

mimSAFE



www.mimsafe.com



AllSafe^{harness}

INSTRUCTIONS FOR USE

- A** The car's seatbelt
- B** Carabiner strap (can be left in the car)
- C** Harness
- D** Padded chestplate

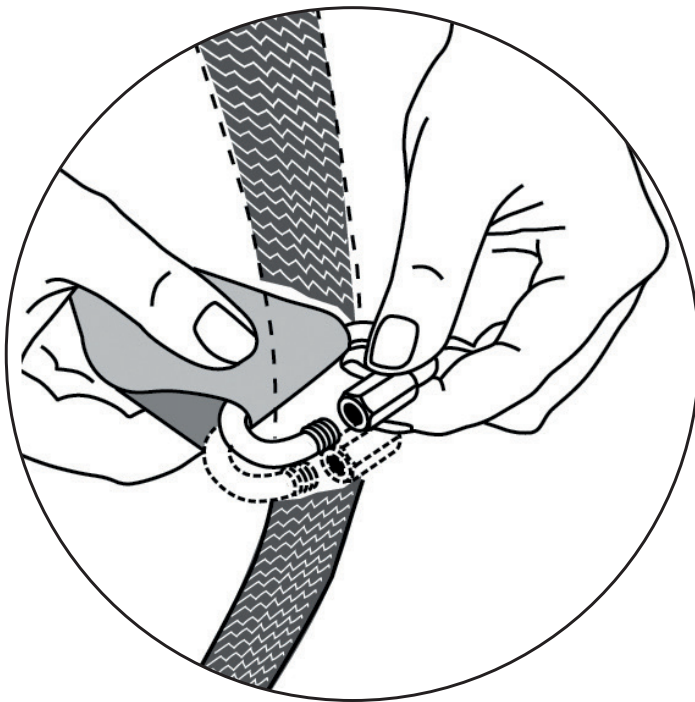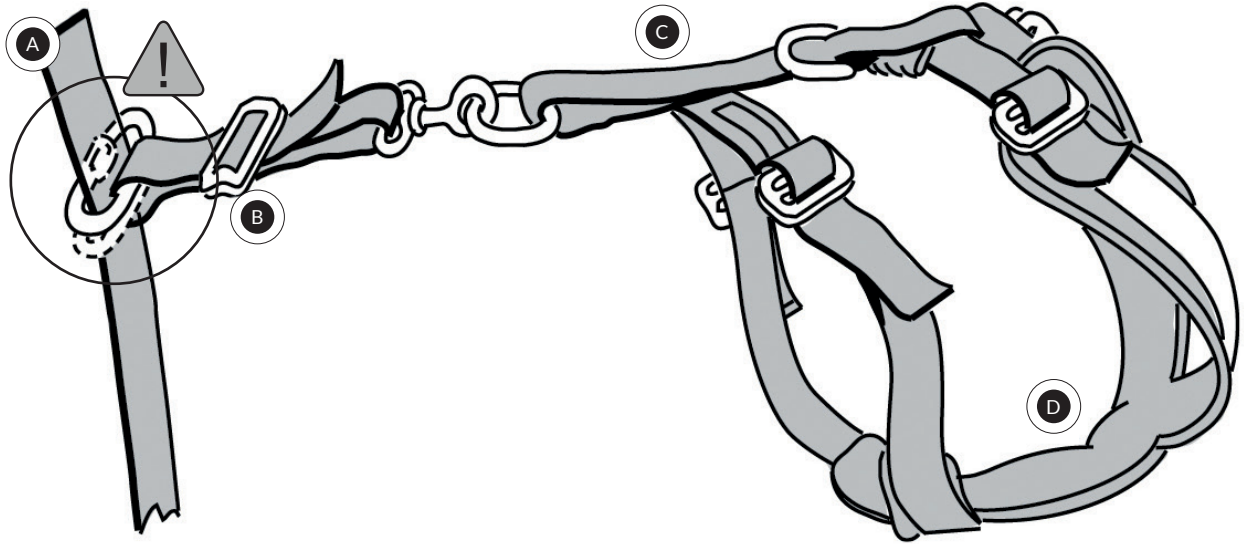

VERY IMPORTANT

For the M, L and XL sizes of the harness, use both quick links to attach the (Carabiner strap) **B** to the seat belt.
 Size S of harness only has one quick link to attach to the seat belt.

Use Description:


Create a larger opening in the harness to be able to pass the harness over the dog by releasing the harness's waist straps. Thread the harness over the dog and then tighten the straps evenly and not too hard. Secure the harness by re-threading the straps through the buckles.

If the straps are too long, they can be cut off and "sealed" by burning the ends with a lighter. Attach the strap with the carbine hook to the seat belt.

When traveling, the carabiner's strap should be attached to the harness's lower lashing ring. At the end of the journey, the harness is detached from the strap with a carabiner. For regular leash, the upper lashing ring can be used.

STEP


1

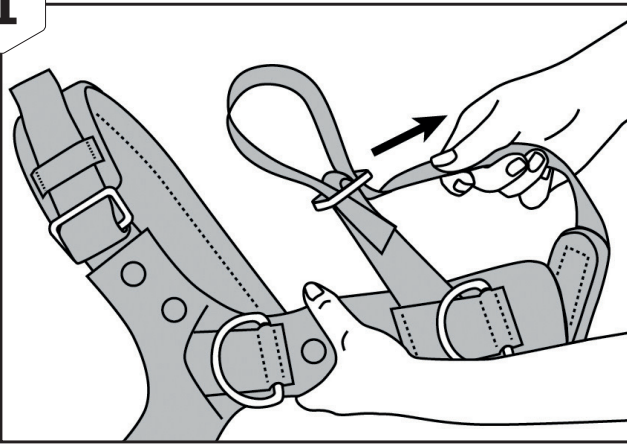

1. Release and extend rear straps, left and right
2. Step through the front legs
3. Step through the head
4. Tighten both rear straps and if necessary, cut off the strap ends.
5. Warning: It is imperative to re-tighten the strap to secure the dog completely.
6. Attach both quick links to the seat belt.
Note: Size S of harness only have one quick link.
7. Attach the carabiner strap exclusively to the lower lashing ring of the harness, for safety reasons!


STEP

2

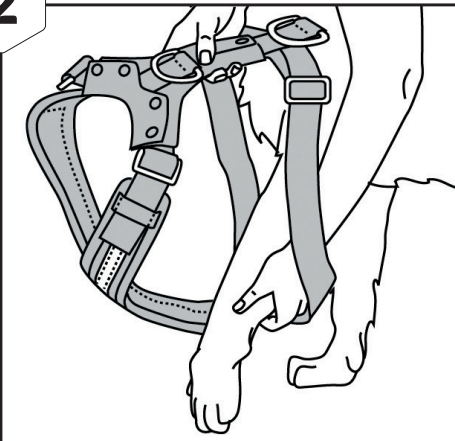


STEP

3

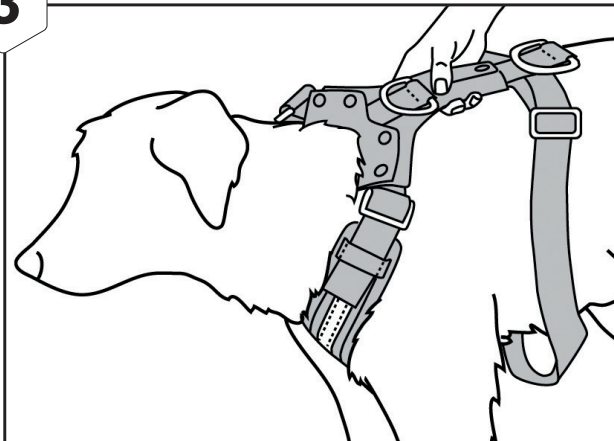


STEP

4

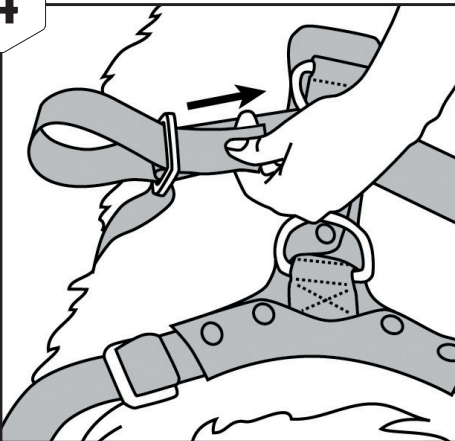


STEP

5

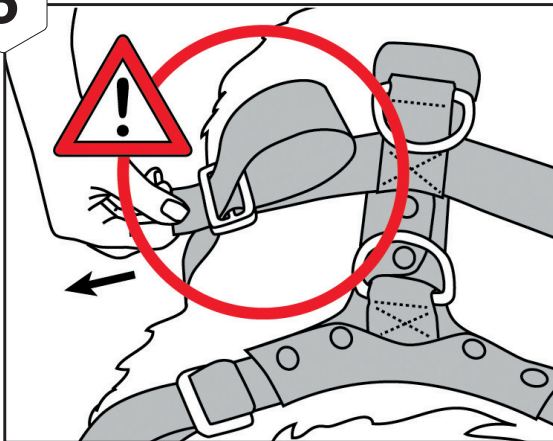


STEP

6

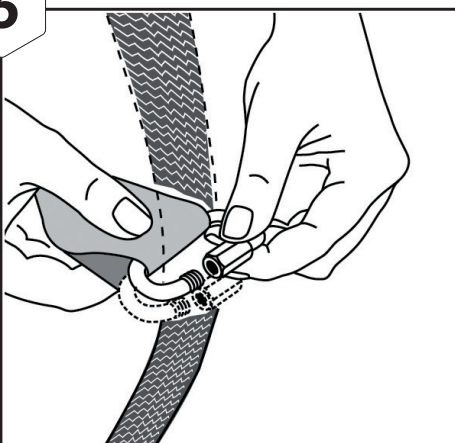

STEP


7

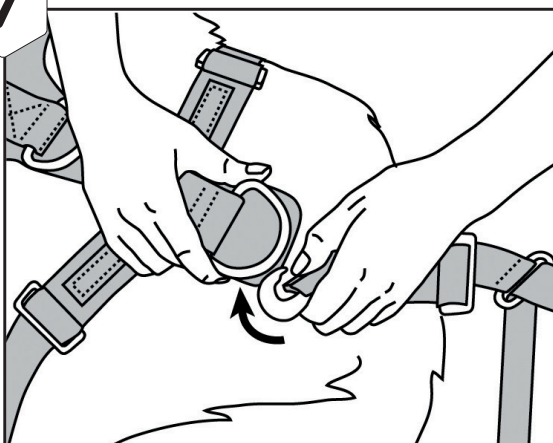



WARNING

Make sure that the lower lashing ring is used to attach the harness to the seatbelt.

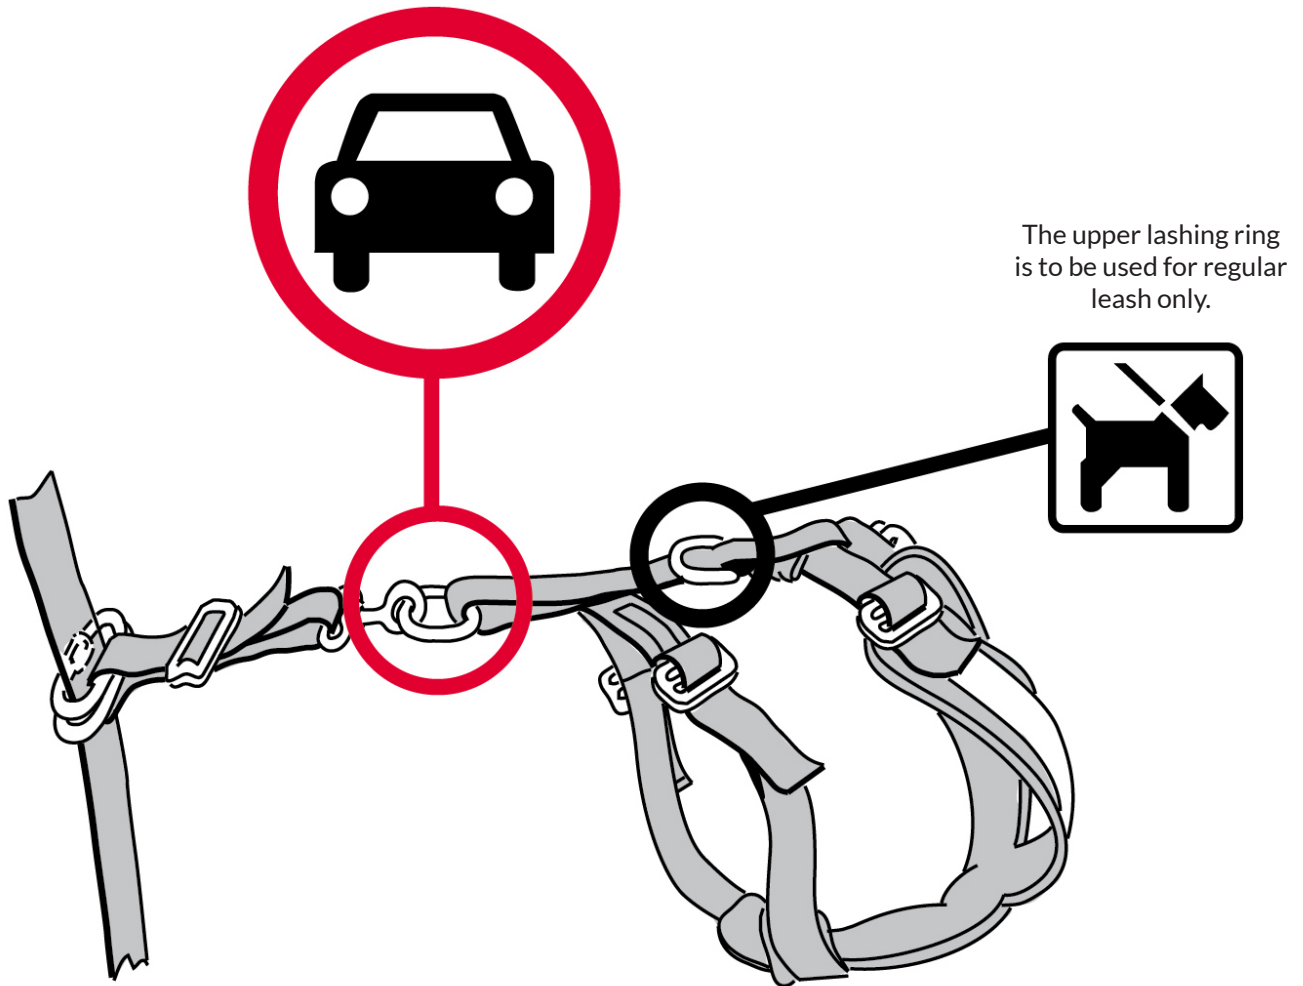

Care instructions:

When dirt and hair need to be removed from the harness, use a neutral soap.



Security Note:

The dog must always be transported in the back seat. Ideally behind a passenger-free front seat.

Check the harness regularly and replace the part that is broken or worn.